

SER series

- 105°C high-temperature resistance, high reliability and long life.
high ripple current.
- Suitable for office communicative or industrial equipments.
- RoHS Compliance.
- 105°C耐高温、高信賴性、長壽命。
- 適用於辦公室通訊設備、工業設備。



SPECIFICATIONS

Items 項目	Characteristics 特性															
Capacitance Tolerance 靜電容量誤差	$\pm 20\%$ (120Hz,20°C)															
Operating Temperature Range 適用溫度範圍	-40 ~ +105°C		-25 ~ +105°C													
Rated Voltage Range 額定電壓範圍	160 ~ 400VDC		450VDC													
Leakage Current 洩漏電流	$I \leq 0.03CV + 20 (\mu A)$ (After 3 minutes application of DC rated voltage)															
Dissipation Factor 散逸因素($\tan \delta$)	Measurement Frequency: 120Hz. Temperature: 20°C <table border="1"> <tr> <td>Rated Voltage(V)</td> <td>160 ~ 250</td> <td>400 ~ 450</td> </tr> <tr> <td>$\tan \delta$(Max)</td> <td>0.15</td> <td>0.20</td> </tr> </table>				Rated Voltage(V)	160 ~ 250	400 ~ 450	$\tan \delta$ (Max)	0.15	0.20						
Rated Voltage(V)	160 ~ 250	400 ~ 450														
$\tan \delta$ (Max)	0.15	0.20														
Low Temperature Stability 低溫特性	Measurement Frequency: 120Hz. <table border="1"> <tr> <td>Rated Voltage(V)</td> <td>160 ~ 250</td> <td>400</td> <td>450</td> </tr> <tr> <td>$Z(-25^\circ C) / Z(20^\circ C)$</td> <td>3</td> <td>5</td> <td>6</td> </tr> <tr> <td>$Z(-40^\circ C) / Z(20^\circ C)$</td> <td>6</td> <td>6</td> <td>-</td> </tr> </table>				Rated Voltage(V)	160 ~ 250	400	450	$Z(-25^\circ C) / Z(20^\circ C)$	3	5	6	$Z(-40^\circ C) / Z(20^\circ C)$	6	6	-
Rated Voltage(V)	160 ~ 250	400	450													
$Z(-25^\circ C) / Z(20^\circ C)$	3	5	6													
$Z(-40^\circ C) / Z(20^\circ C)$	6	6	-													
Impedance Ratio(Max) 阻抗比率(最大值)																
Load Life 負荷壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after subjected to DC voltage with the rated ripple current is applied for 5,000 hours at 105°C. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within $\pm 25\%$ of Initial Value</td> </tr> <tr> <td>$\tan \delta$</td> <td>200% of less of Initial Specified Value</td> </tr> <tr> <td>Leakage Current</td> <td>Initial Specified Value or less</td> </tr> </table>				Capacitance Change	Within $\pm 25\%$ of Initial Value	$\tan \delta$	200% of less of Initial Specified Value	Leakage Current	Initial Specified Value or less						
Capacitance Change	Within $\pm 25\%$ of Initial Value															
$\tan \delta$	200% of less of Initial Specified Value															
Leakage Current	Initial Specified Value or less															
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1,000 hours 105°C without voltage applied. Before the measurement, the capacitor shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4. <table border="1"> <tr> <td>Capacitance Change</td> <td>Within $\pm 20\%$ of Initial Value</td> </tr> <tr> <td>$\tan \delta$</td> <td>200% of less of Initial Specified Value</td> </tr> <tr> <td>Leakage Current</td> <td>Initial Specified Value or less</td> </tr> </table>				Capacitance Change	Within $\pm 20\%$ of Initial Value	$\tan \delta$	200% of less of Initial Specified Value	Leakage Current	Initial Specified Value or less						
Capacitance Change	Within $\pm 20\%$ of Initial Value															
$\tan \delta$	200% of less of Initial Specified Value															
Leakage Current	Initial Specified Value or less															
Standards 參照標準	JIS C 5101-4 (IEC 60384)															


Frequency Coefficient of Permissible Ripple Current

Capacitance (μF)	Frequency (Hz)			
	120	1K	10K	100K
22 ~ 82	1.00	1.25	1.50	1.75
100 ~ 470	1.00	1.15	1.30	1.40

The endurance of capacitors is reduced with internal heating produced by ripple current at the rate of halving the lifetime with every 5°C rise. When long life performance is required in actual use, the rms ripple current has to be reduced.

SER series

DIMENSIONS(mm)

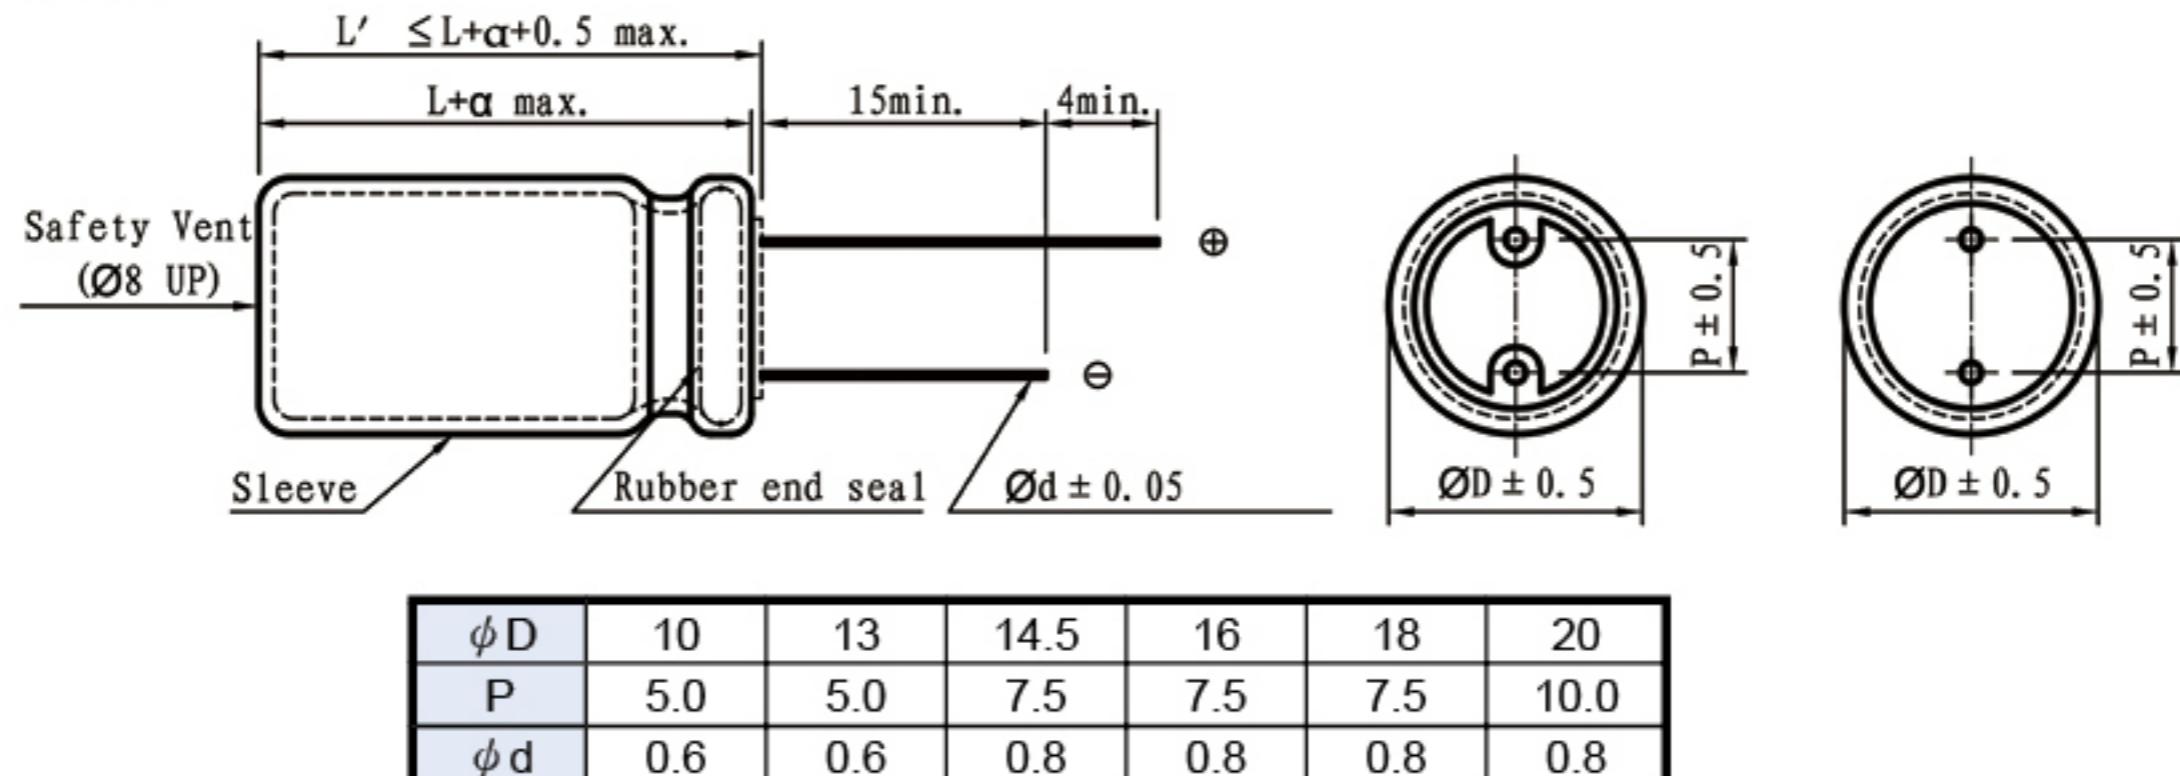

STANDARD RATINGS

DxL(mm) ; R.C.(mA rms) at 105°C 120Hz.

Cap (μF)	V	160		200		250		400		450	
		Item	D x L	R.C.	D x L	R.C.	D x L	R.C.	D x L	R.C.	D x L
22	10x16	130						10x30	205	10x40	280
33	10x20	210						10x40	260	13x35	290
39	10x20	210						10x45	320	13x40	345
47	10x25	305						13x35	385	10x50	350
										14.5x40	420
56	10x25	305						13x40	420	14.5x40	420
										16x30	477
68	10x25	345	10x30	445	13x25	490	13x45	500	14.5x45	550	
							14.5x30	500	18x32	550	
82	10x30	445	10x35	485	13x30	550	14.5x40	545	16x40	650	
									18x32	650	
100	10x35	485	10x40	560	16x25	620	14.5x45	600	18x36	720	
							18x32	600			
120	10x40	560	10x45	680	16x32	685	16x40	710	18x40	800	
							18x36	710			
150	10x45	680	13x35	720	16x35	815	18x40	835	18x45	960	
									20x40	1000	
220	13x40	850	13x45	890	18x36	1020					
			14.5x35	890							
270	13x45	945	16x35	1030	18x40	1090					
330	16x35	1100	16x40	1200							
			18x32	1200							
470	18x40	1220	18x45	1305							

※ 13mm may be replaced by 12.5mm upon customer's request.

SER