

# CLL series

- Low impedance, 105°C 7000 hours~10000 hours Long Life.
- Applicable to SMT process.
- RoHS Compliance.
- 105°C 低阻抗、7000小時~10000小時 長壽命產品。
- 適用于SMT制程。



## SPECIFICATIONS

Items 項目	Characteristics 特性						
Capacitance Tolerance 靜電容量誤差	$\pm 20\%$ (120Hz,20°C)						
Operating Temperature Range 適用溫度範圍	-25°C ~ + 105°C						
Rated Voltage Range 額定電壓範圍	6.3~50VDC						
Capacitance Range 靜電容量範圍	10~1000μF						
Leakage Current 洩漏電流	$I \leq 0.01CV$ or 3 ( $\mu$ A) , which is greater. ( After 2 minutes application of DC rated voltage, at 20°C)						
Dissipation Factor 散逸因素( $\tan \delta$ )	Measurement Frequency:120Hz. Temperature: 20°C						
	Rated Voltage(V)	6.3	10	16	25	35	50
	$\tan \delta$ (Max)	0.32	0.28	0.26	0.16	0.14	0.14
Low Temperature Stability 低溫特性	Measurement Frequency:120Hz						
Impedance Ratio(Max) 阻抗比率(最大值)	Rated Voltage(V)	6.3	10	16	25	35	50
	$Z(-25^{\circ}\text{C})/Z(20^{\circ}\text{C})$	4	3	2	2	2	2
Load Life 負荷壽命	$\Phi \leq 6.3 : 7000\text{hours}, \Phi \geq 8 : 10000$ with application of rated voltage at 105°C						
	Capacitance Change	within $\pm 30\%$ of Initial Value					
	$\tan \delta$	300% or less of Initial Specified Value					
	Leakage Current	Initial Specified Value or less					
Shelf Life 放置壽命	The following specifications shall be satisfied when the capacitors are restored to 20°C after exposing them for 1000hours 105°C without voltage applied. Before the measurement. The Capacitance shall be preconditioned by applying voltage according to them 4.1 of JIS C5101-4.						
	Capacitance Change	within $\pm 30\%$ of Initial Value					
	$\tan \delta$	300% or less of Initial Specified Value					
	Leakage Current	Initial Specified Value or less					
Resistance to Soldering Heat 焊錫耐熱性	The capacitors shall be kept on the hot plate maintained at 250°C for 30seconds.				Capacitance Change	Within $\pm 10\%$ of Initial Value	
	After removing from the hot plate and restored at room temperature they meet the characteristics requirements listed at right.				$\tan \delta$	Initial Specified Value	
					Leakage Current	Initial Specified Value or less	
Standards 參照標準	IEC 60384-4 (JIS C 5101-4)						

## Frequency Coefficient of Permissible Ripple Current

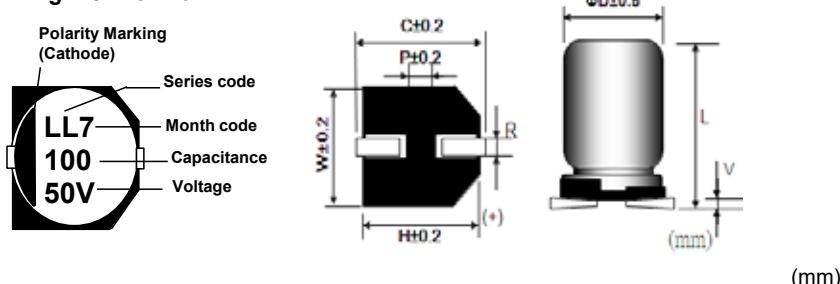
Frequency (Hz) Capacitance ( $\mu$ F)	$120 \leq F < 1\text{K}$	$1\text{K} \leq F < 10\text{K}$	$10\text{K} \leq F < 100\text{K}$	$100\text{K} \leq F$
$C \leq 22$	0.50	0.80	0.90	1.00
$22 < C \leq 150$	0.65	0.85	0.92	1.00
$C > 150$	0.70	0.85	0.95	1.00

CLL

# CLL series

## DIMENSIONS(mm)

### Chip Type

Fig.1  $\Phi D=5\sim 10mm$ 

Size	$\Phi D$	L	W	H	C	R	P	Vmax
5x7	5.0	7.0±0.3	5.3	5.3	5.9	0.5~0.8	1.4	0.3
6.3x7	6.3	7.0±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
6.3x8.4	6.3	8.4±0.3	6.6	6.6	7.2	0.5~0.8	2.1	0.3
8x10	8.0	10±0.5	8.3	8.3	9.0	0.7~1.1	3.2	0.3
10x10	10.0	10±0.5	10.3	10.3	11.0	0.7~1.3	4.5	0.3

## STANDARD RATINGS

D×L(mm) ; R.C.(mA rms) at 105°C 100KHz, ESR(Ω max) at 20°C 100KHz.

Cap (μF)	V	6.3			10			16			25			35			50			
		Item	D x L	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR	D x L	R.C.	ESR
10															5x7	95	2.20			
									5x7.0	95	2.20	5x7	95	2.20	5x7	95	2.20	6.3x8.4	100	1.80
22												6.3x7	140	1.10	6.3x8.4	230	1.00	8x10	350	0.53
33				5x7	95	2.20	6.3x7.0	140	1.10	6.3x7	140	1.10	6.3x8.4	230	1.00	8x10	350	0.53		
47	5x7	95	2.20				6.3x7.0	140	1.10	6.3x8.4	230	1.00	8x10	600	0.22	10x10	670	0.35		
100	6.3x7	140	1.10				6.3x8.4	230	1.00	8x10	600	0.22								
150				6.3x7	140	1.10	6.3x8.4	230	1.00	8x10	600	0.22	10x10	850	0.16					
220	6.3x8.4	230	1.00				8x10	600	0.220	10x10	850	0.16	10x10	850	0.16					
330	6.3x8.4	230	1.00				10x10	850	0.16											
470	8x10	600	0.22																	
1000	10x10	850	0.16																	